

Sliding Wood Door Fittings

EKU-CLIPO 15 V






- Max. **15 kg** (33 lbs.) door weight for **wood doors**
- Door thicknesses of **16 and 19 mm** (5/8" and 3/4")
- Running gears **for insertion**, plastic rollers with metal axles
- Housing is screwed into a grooved edge
- Available as complete fitting sets
- Maximum door width: **1000 mm** (39 3/8")
- Maximum door height: **1400 mm** (55 1/8")

Advantages:


- Quick door mounting
- No guide rails in the floor
- Especially suitable for serving counters, because the fitting is mounted in the upper edge, thus leaving both sides of the door free of fittings
- Application as Infront and Mixfront
- Wood doors can also be combined with glass doors, pages 506-533



15 V Infront (Top and Bottom detail)

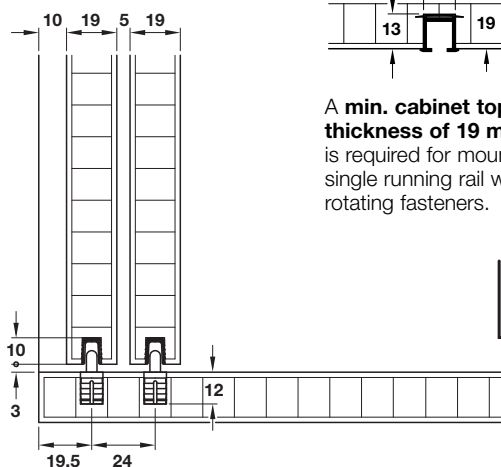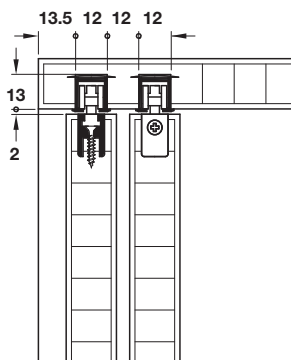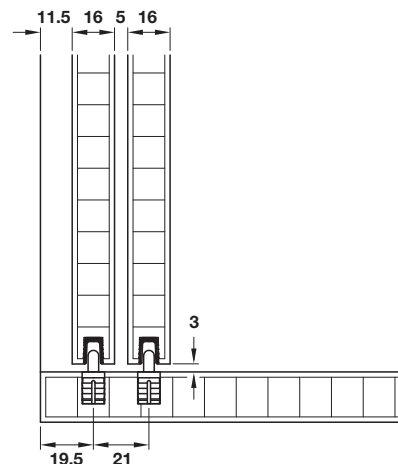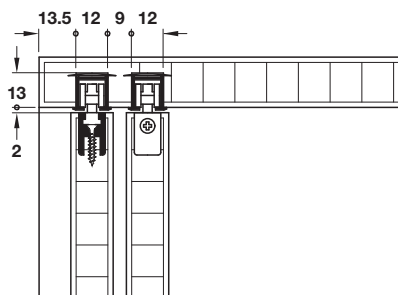




A min. cabinet top thickness of 25 mm (1") is required for mounting the single running rail with screw holes.



A min. cabinet top thickness of 19 mm (3/4") is required for mounting the single running rail with rotating fasteners.



15 V Mixfront (Bottom detail, top detail same as Infront)

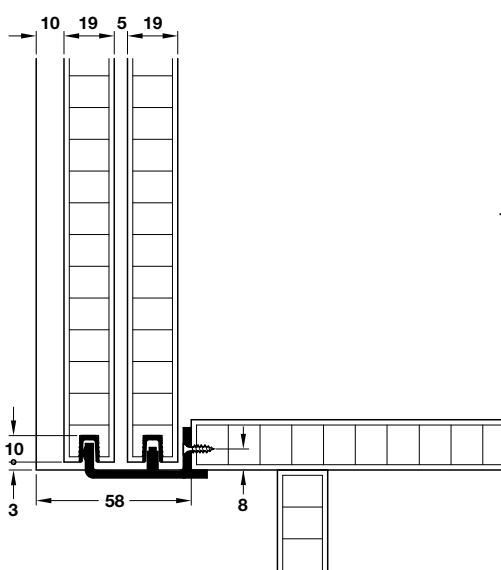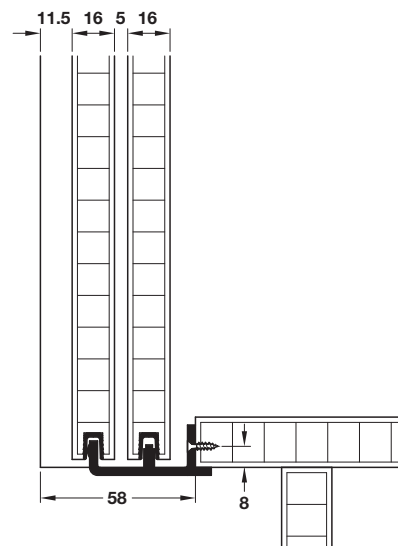

Dimensions in mm
Inches are approximate